



# QuantaMaster™ 40

Steady State Spectrofluorometer with Q-11A Laser Lifetime Upgrade

## Specifications


### Steady State

Emission Range	185 to 680 nm (optional to 900 nm)
Detection Limit	460 attomolar
Steady State Light Source	High power continuous Xenon arc lamp
Monochromators	Czerny-Turner design
Focal Length	200 nm
Excitation Grating	1200 line/mm 300 nm blaze
Emission Grating	1200 line/mm 400 nm blaze
Optional Grating	75–2400 line/nm and holographic models available
Bandpass	0–24 nm, continuously adjustable (computer control available)
Wavelength Accuracy	± 0.5 nm
Resolution	0.06 nm
Detection	Photon counting/analog
System Control	Computer interface with spectroscopy software

### Lifetime

Lifetime Range	100 picoseconds to 50 microseconds
Wavelength Range	360 to 1000 nm (depending on dye used) (235 to 1000 nm with optional frequency doubler)
Pulse Width	800 picoseconds
Emission Range	185 to 680 nm (optional to 900 nm)
Detection	Time domain, patented stroboscopic technique
Repetition Range	2 to 20 Hz

*Add fluorescence lifetime capability from 331–1000 nm  
(235 to 1000 nm optional)*

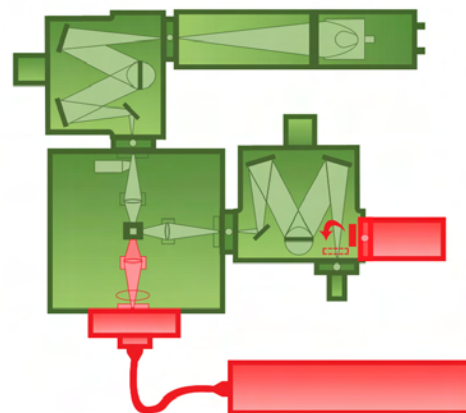

Photon Technology International

USA: Photon Technology International, Inc., 300 Birmingham Road, PO Box 272 Birmingham, NJ 08011  
Tel: 609-894-4420, Fax: 609-894-1579, E-mail: [marketing@pti-nj.com](mailto:marketing@pti-nj.com), [www.pti-nj.com](http://www.pti-nj.com)

Canada: Photon Technology International, Inc., 347 Consortium Court, London, Ontario, N6E 2S8  
Tel: 519-668-6920, Fax: 519-668-8437, E-mail: [sales@pti-can.com](mailto:sales@pti-can.com)

UK: Photon Technology International, Inc., Unit M1 Rudford Industrial Estate, Ford Road, Ford, West Sussex BN180BF  
Tel: +44 (0) 1903 719555, Fax: +44 (0) 1903 725722. E-mail: [sales@pti-uk.co.uk](mailto:sales@pti-uk.co.uk)

Germany: PhotoMed GmbH, Inninger Str. 1, 82229 Seefeld, Germany,  
Tel: +49 (0) 8152 993090, Fax: +49 (0) 8152 993098, E-mail: [sales@photomed.com](mailto:sales@photomed.com)